


REV:	DESCRIPTION	DATE:
00	Sample drawing	2012. 04. 25

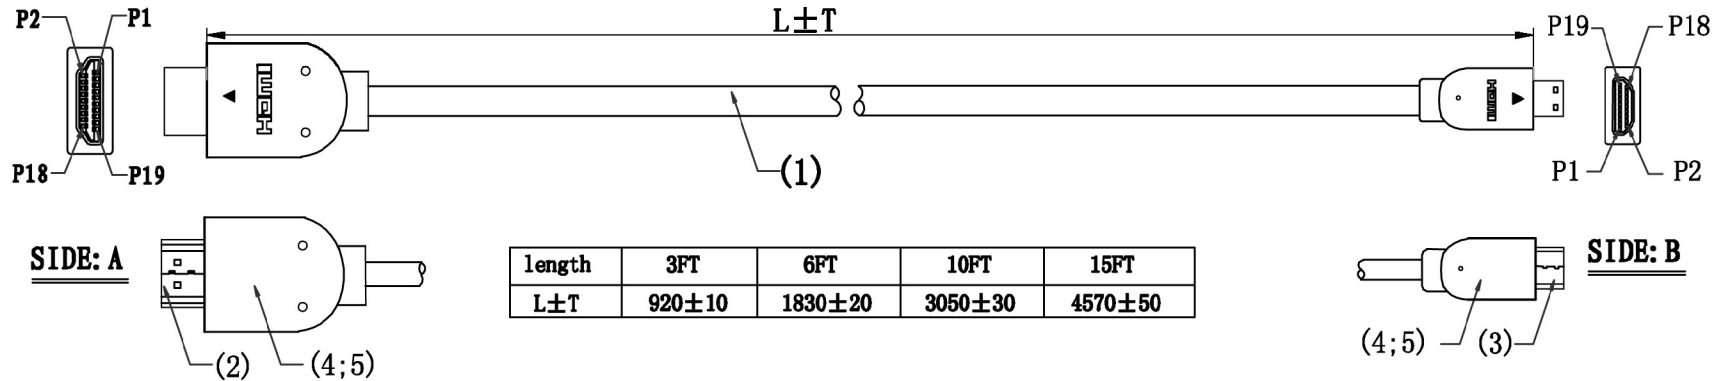

**NOTE:**

- (1) Cable UL20276[32#(7/0.08Tcu)\*1P+ADM]\*5P+32#(7/0.08Tc)\*4C+  
MAD(7/0.08Bc) B(16\*4/0.12AL-MG)  
Jacket Material:PVC OD:4.8±0.15mm  
Colour:Black  
Cable Printing:High Speed HDMI™ Cable E301195 AWM STYLE 20276  
80°C 30V VW-1
- (2) Connector A:HDMI A 19PIN Male Solder Type  
Insulation:Black  
Contact:Phosphor Bronze,Gold Plated  
Shell:Gold Plated
- (3) Connector B:Micro HDMI D TYPE Male Solder Type  
Insulation:Black  
Contact:Phosphor Bronze,Gold Plated  
Shell:Gold Plated
- (4) Over Molding Colour:PVC-45P-Black
- (5) Parameter Settings: CT-8681FA  
1. Insulation Resistance:5MΩ (MIN).  
2. Conductive Resistance:1.5~2.5Ω
- (6) Packing: POLYBAG Packing

SIDE:A		SIDE:B		SIDE:A		SIDE:B	
HDMI 19AM		Micro 19DM		HDMI 19AM		Micro 19DM	
1	White	3	White	10	White	12	White
3	Red	5	Red	12	Orange	14	Orange
5	Drain	7	Drain	8	Drain	10	Drain
4	White	6	White	13	Orange	15	Orange
6	Green	8	Green	14	White	2	White
2	Drain	4	Drain	19	Brown	1	Brown
7	White	9	White	17	Drain	16	Drain
9	Blue	11	Blue	15	Yellow	17	Yellow
11	Drain	13	Drain	16	White	18	White
Shell	Drain+Braid	Shell	Drain+Braid	18	Red	19	Red

GENERAL TOLERANCES (UNLESS SPECIFIED)		GEMBIRD ELECTRONICS LTD			
		<a href="http://www.gembird.cn">http://www.gembird.cn</a>			
LENGTH: X. ±1 .X ±0.2 .XX ±0.10	UNIT: mm	REV: 00		NAME	
ANGLE: X° ±1° .X° ±0° 30'	DRAWING	2012. 04. 25	S. P. NO.	DWG. NO.	
	CHECK		P. O. NO.	PAGE	1/1
	APPROVE		SIZE		